

# sunshower®

health & wellbeing

## PURE XL

BUILD-IN | FULL BODY | INFRARED

ARTICLE NO. 80074 / 80064

### TECHNICAL SPECIFICATIONS

SESSION TIME	10 MINUTES + 5 MINUTES COOLING
DIMENSIONS (H*W*D)	1238 * 199 * 100 MM (RECESSED)
NET WEIGHT	3.5 KG
IP CODE	IPX5
VOLT/FREQUENTIE	230 V~ / 50 Hz
POWER	1500 W
INSULATION CLASS	I
LAMP TYPE	2X IR USHIO 750 W
TEMPERATURE RANGE	10°C - 40°C
HUMIDITY RANGE	20% - 100%



### INSTALLATION

- Recessed in cabin wall
  - Prepare electrics in the wall
  - Prepare ventilation in the wall
- Suitable for installation in shower cabin
- Suitable for installation in steam cabin

### ELECTRICS


- Can be added to an existing fuse group
- YMKV cable 3x2,5mm<sup>2</sup> + PE cable 6mm<sup>2</sup>
- Connect to RCD 30mA

### VENTILATION

- Round channel diameter of 100mm or rectangular channel of 110x54mm
- Air intake bottom center, air exhaust top center
- Ventilation to other dry area (minimally 12 m<sup>3</sup>), outdoor or to the bathroom (in case of an enclosed shower cabin)
- The Sunshower should not be connected to an external ventilator/mechanical ventilation system

# sunshower®

health & wellbeing

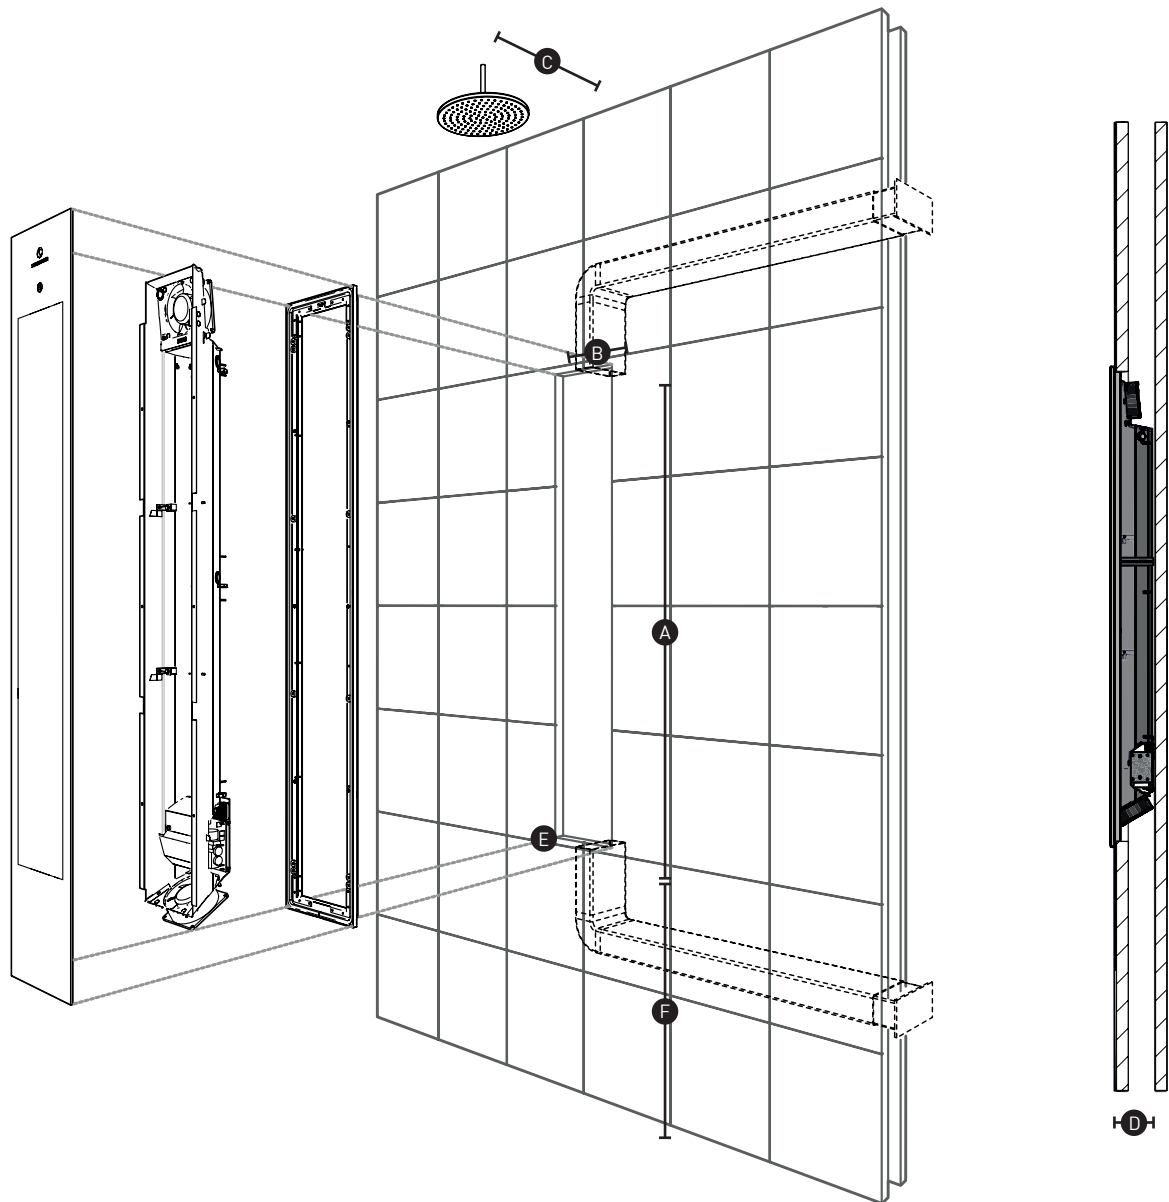

- A** 1215 mm
- B** 176 mm
- C** 450 mm
- D** 130 mm
- E** Electrical connection
- F** 470 mm